


These are high performance, totally corrosion proof sand filters that blend superior flow characteristics and features with easy operation. Efficient flow and totally balanced backwashing is your professional choices for your pools.



Dimensions

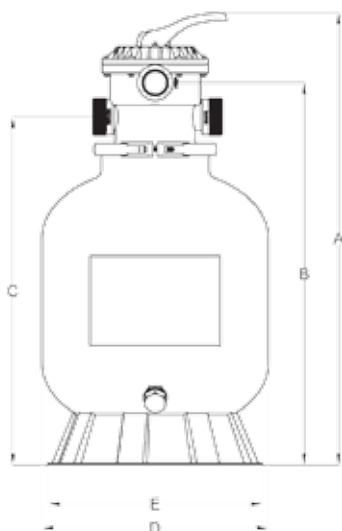

Model Number	A mm(in)	B mm(in)	C mm(in)	D mm(in)	E mm(in)
73040	810(31.9)	685(27)	625(24.6)	406(16)	400(15.8)
73050	930(36.6)	805(31.7)	745(29.3)	485(19)	480(18.9)
73060	1110(43.7)	985(38.8)	925(36.4)	610(24)	480(18.9)
73054	975(38.4)	985(38.7)	790(31)	550(22)	480(18.9)
73057	977(38.5)	987(38.9)	792(31.2)	570(22.5)	480(18.9)

Model Number	Filter Diameter	Filter Area ft ² /m ²	Pipe Size	Design Flow Rate gpm(M ³ /h)	Max Working Pressure PSI(bar)	Media Requires:#20silica sand (.018 to .022in.size)Kg.(lbs)	Carton Dimension (cm)
73040	16"(400)	1.35(0.125)	1 1/2"	35(7.9)	50(3.5)	45(100)	42*42*82
73050	19"(500)	2.1(0.195)	1 1/2"	40(9)	50(3.5)	79(175)	48.6*48.6*90
73060	24"(600)	3.04(0.28)	1 1/2"	50(11.3)	50(3.5)	136(300)	60.5*60.5*103
73054	22"(560)	2.69(0.25)	1 1/2"	45(10)	50(3.5)	115(250)	58*58*96.5
73057	22.5"(570)	2.74(0.255)	1 1/2"	45(10)	50(3.5)	115(250)	59.5*59.5*96.5

Application

- Swimming pools of all types and sizes
- In-ground spas (residential or commercial)
- Water features (fish ponds,fountains,water gardens)

Features

- Flange clamp design allows 360° rotation for easy installation.
- Top diffuser ensures even distribution of water over the top of the sand media bed. All internal piping is 1.5" (Dia: 50mm) to give smooth, free-flowing performance.
- The tank molded of polymeric material HDPE
- Drain for rapid winterizing or servicing.

