


These are high performance, totally corrosion proof sand filters that blend superior flow characteristics and features with easy operation. Efficient flow and totally balanced backwashing is your professional choices for your pools.



Dimensions

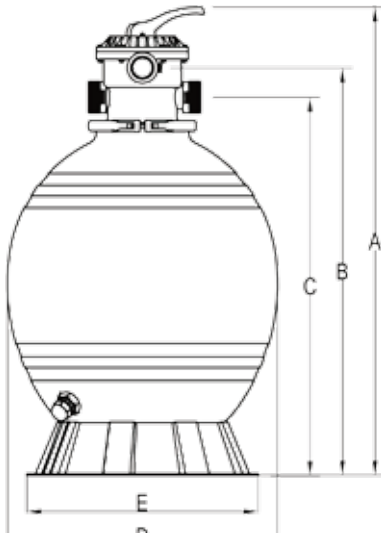

Model Number	A mm(in)	B mm(in)	C mm(in)	D mm(in)	E mm(in)
73045	835(33)	710(28)	650(25.6)	406(18)	400(15.8)
73055	968(38)	843(33)	783(31)	560(22)	480(18.9)
73065	1120(44)	990(39)	920(36)	660(26)	480(18.9)

Application

- Swimming pools of all types and sizes
- In-ground spas (residential or commercial)
- Water features (fish ponds, fountains, water gardens)

Features

- Flange clamp design allows 360° rotation for easy installation.
- Top diffuser ensures even distribution of water over the top of the sand media bed. All internal piping is 1.5" (Dia: 50mm) to give smooth, free-flowing performance.
- The tank molded of polymeric material HDPE
- Drain for rapid winterizing or servicing.



Model Number	Filter Diameter	Filter Area ft²/m²	Pipe Size	Design Flow Rate gpm(Ms/h)	Max Working Pressure PSI(bar)	Media Requires: #20 silica sand (.018 to .022in.size) Kg.(lbs)	Carton Dimension (cm)
73045	18"	1.8(0.167)	1 1/2"	40(9)	50(3.5)	50(110)	47.5*47.5*85
73055	22"	2.5(0.232)	1 1/2"	45(10)	50(3.5)	100(220)	57*57*99
73065	26"	3.6(0.334)	1 1/2"	53(12)	50(3.5)	160(360)	67*67*104